EST. 1835

DESIGNED TO MEET THE DEMANDS FOR A **HIGH SECURITY INSTALLATION**

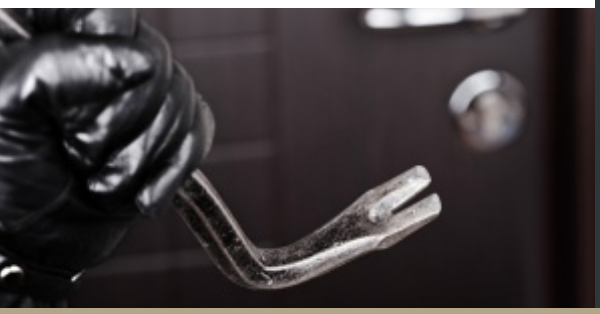

3½" STRONGROOM DOOR

BURGLARY RESISTANT PROTECTION

KEY FEATURES

- Solid door slab with a protective thickness of 89mm (3½") forms the basis of the door which has an overall thickness of 226mm. Filled with special formulated F80 barrier material reinforced with steel fibers provides resistant to high speed drilling, oxy-acetylene cuttings and jack attacks.
- Secured by 7 active front bolts, 2 active top bolts, 2 active bottom bolts and 7 fixed rear bolts. Each bolt has a diameter of 50mm.
- Secured by a 3-wheel Keyless Combination Lock and a 11-lever double bitted Key Lock as standard. Both locks operated independently.
- Protected by two Glass Relockers. Any forced attempt to dislodge the locks would activate relocker and restricts the movement of the internal boltwork system.
- Relockers are further protected by Chubbsafes patented Torch and drill resistant (TDR)material.
- The "wrapped around the wall" door frame is fabricated from steel sections, bent to form a single structure. Vestibule side frames at full height of the door are attached to the frame and grip the inside of the wall. This design provides stronger resistance against attacks to the door.

3½" STRONGROOM DOOR

PRODUCT SPECIFICATIONS

Model	External Dimensions (mm)	Clear Opening (mm)	Wall Opening (mm)	Wall Thickness (mm)	Approx. Net Weight (kg)
3 ½"	2110(H) x 1312(W)	1920(H) x 814(W)	2080(H) x 1150(W)	300 (inclusive of Plastering)	740 (Door) and 20 (Gate)

STANDARD LOCKS

KEYLESS COMBINATION LOCK

Secured by a high seurity 3-wheel Keyless Combination Lock capable of 1,000,000 changes of code. The lock certificated under UL Group 2, VdS Class 1, Cen A.

KEYLOCK

Secured by a 11-lever double bitted high security Key Lock from Germany with non detachable key bit.

EMERGENCY VENTILATOR

An emergency ventilator is integrated into the door frame to provide fresh air, allow two way conversation and to supply food or water to anyone trapped in the strongroom door.

LIGHTING CONTROL SWITCH

A relay micro switch is fitted to the door to control the electric lighting in the room and to ensure that when the door is closed, all lighting within the room is switched off.

ALARM MICRO SWITCH

A relay micro switch is fitted to the door for possible connection to the main intruder alarm system as an additional protection.

OPTIONS

DAY GATE

An Optional Day Gate can be fitted to the door for ventilation during the day or as control when the door is open. The Day Gate is secured by two high security 5-lever Mortice Deadlocks.

LOCKS

- A Dial Check Lock can be fitted as an option to the combination lock
- Two or three movement Time Lock may be fitted as an additional requirement
- A 4-wheel Keyless Combination Lock can be fitted to replace the 3-wheel Keyless Combination Lock as an option

FINISH

The door comes standard with a painted grey primer based finish with an option for a stainless steel cladded finish.

WHEN ORDERING, PLEASE STATE:

a) Thickness of RC Wall
b) Hung of door required
c) If to be installed in multi-storey building, state floor level
d) Path of access to where door is to be installed.

NOTE

Chubbsafes Doors are designed primarily against physical attack, but for recommended storage of paper documents and computer media, ask for details of Chubbsafes Fire Resistant Protection Cabinet or Chubbsafes Data Cabinets

Authorised dealer

The data given in this material may be subject to change without further notice. This document is not contractually binding. The 'Chubb' brand is owned by Chubb plc and is a registered trademark used under license. See www.chubbsafes.com.my for more information.